



LC1117

1A Bipolar Linear Regulator

DESCRIPTION

LC1117 is a series of low dropout three-terminal regulators with a typical dropout voltage of 1.26V at 1A load current.

Other than a fixed version ($V_{out} = 1.2V, 1.5V, 1.8V, 2.5V, 3.3V, 5V$), LC1117 has an adjustable version, which can provide an output voltage ranges from 1.25 to 13.8V with only two external resistors.

LC1117 offers thermal shut down and current limit functions to assure the stability of chip and power system. It employs trimming technique to guarantee output voltage accuracy within $\pm 2\%$. Other output voltage accuracy, such as $\pm 1\%$ can be customized on command.

LC1117 is available in SOT223, TO-252 and SOT23-6 packages.


FEATURES

- Other than a fixed version and an adjustable version, output value can be customized on command.
- Maximum output current is 1A
- Range of operation input voltage: Max 15V
- Line regulation: 0.2%
- Load regulation: 0.4%
- Environment Temperature: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

APPLICATIONS


- Power Management for Computer Mother Board, Graphic Card
- LCD Monitor and LCD TV
- DVD Decode Board
- ADSL Modem
- Post Regulators for Switching Supplies

TYPICAL APPLICATION

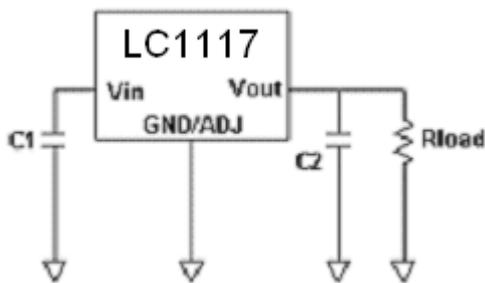

Typical Application circuit of LC1117 fixed version

ELECTRICAL CHARACTERISTICS

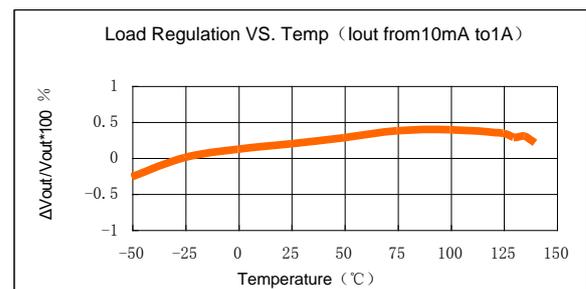

LC1117

ORDERING INFORMATION

LC1117 1 2 3 4 5

Code	Description
1	Temperature & Rohs: C:-40~85°C ,Pb Free Rohs Std.
2	Package type: L:SOT-223 O:TO-252 B6: SOT-23-6
3	Packing type: TR: Tape & Reel (Standard)
4	Output voltage: e.g. 12=1.2V 18=1.8V AD=Output adjustable
5	Voltage accuracy: 1= ± 1%(Customized) Blank(default)= ± 2%

ABSOLUTE MAXIMUM RATING

Parameter	Value	
Max Input Voltage	15V	
Operating Junction Temperature(Tj)	150°C	
Ambient Temperature(Ta)	-40°C ~85°C	
Package Thermal Resistance (Junction –Case)	SOT-223	20°C / W
	TO-252	12.5°C / W
	SOT23-6	80°C / W
Storage Temperature(Ts)	-40°C -150°C	
Lead Temperature & Time	260°C,10S	

RECOMMENDED WORK CONDITIONS

Parameter	Value
Input Voltage Range	Max.15V
Operating Junction Temperature(Tj)	-40°C ~125°C

Note:

Exceeding these limits may damage the device.
Exposure to absolute maximum rating conditions may affect device reliability.

PIN CONFIGURATION

Product Classification		LC1117CLTR□□
Marking		
1117 B XXYYZZ	1117:Product Code	
	B:Fab Code	
	XX: Output Voltage	
	YY:Lot No.	
	ZZ:Date Code	
Product Classification		LC1117COTR□□
Marking		
1117 B XXYYZZ	1117:Product Code	
	B:Fab Code	
	XX: Output Voltage	
	YY:Lot No.	
	ZZ:Date Code	
Product Classification		LC1117CB6TR□□
Marking		
XXYY	XX: Output Voltage	
	YY: Lot No.	
Name	Description	
Vss/Adj	Ground Pin/Adjustable	
Vin	Supply Voltage Input	
Vout	Output Voltage	

ELECTRICAL CHARACTERISTICS

$T_j=25^{\circ}\text{C}$

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Vref	Reference Voltage	$I_{out}=10\text{mA}$, $V_{in}-V_{out}=2\text{V}$ $10\text{mA} \leq I_{out} \leq 1\text{A}$, $1.5\text{V} \leq V_{in}-V_{out} \leq 12\text{V}$	1.231 1.225	1.25 1.25	1.268 1.275	V
Vout	Output Voltage	LC1117-1.20V $I_{out}=10\text{mA}$, $V_{in}=3.2\text{V}$, $T_j=25^{\circ}\text{C}$ $0 \leq I_{out} \leq 1\text{A}$, $3.0\text{V} \leq V_{in} \leq 25\text{V}$	1.176 1.14	1.20 1.20	1.224 1.248	V
		LC1117-1.50V $I_{out}=10\text{mA}$, $V_{in}=3.2\text{V}$, $T_j=25^{\circ}\text{C}$ $0 \leq I_{out} \leq 1\text{A}$, $3.0\text{V} \leq V_{in} \leq 25\text{V}$	1.478 1.47	1.5 1.5	1.523 1.53	V
		LC1117-1.80V $I_{out}=10\text{mA}$, $V_{in}=3.8\text{V}$, $T_j=25^{\circ}\text{C}$ $0 \leq I_{out} \leq 1\text{A}$, $3.2\text{V} \leq V_{in} \leq 25\text{V}$	1.773 1.764	1.80 1.80	1.827 1.836	V
		LC1117-2.5V $I_{out}=10\text{mA}$, $V_{in}=4.5\text{V}$, $T_j=25^{\circ}\text{C}$ $0 \leq I_{out} \leq 1\text{A}$, $3.9\text{V} \leq V_{in} \leq 25\text{V}$	2.462 2.45	2.5 2.5	2.538 2.55	V
		LC1117-2.85V $I_{out}=10\text{mA}$, $V_{in}=4.85\text{V}$, $T_j=25^{\circ}\text{C}$ $0 \leq I_{out} \leq 1\text{A}$, $4.25\text{V} \leq V_{in} \leq 25\text{V}$	2.807 2.793	2.85 2.85	2.893 2.907	V
		LC1117-3.3V $I_{out}=10\text{mA}$, $V_{in}=5\text{V}$, $T_j=25^{\circ}\text{C}$ $0 \leq I_{out} \leq 1\text{A}$, $4.75\text{V} \leq V_{in} \leq 25\text{V}$	3.250 3.234	3.3 3.3	3.349 3.366	V
		LC1117-5V $I_{out}=10\text{mA}$, $V_{in}=7\text{V}$, $T_j=25^{\circ}\text{C}$ $0 \leq I_{out} \leq 1\text{A}$, $6.5\text{V} \leq V_{in} \leq 25\text{V}$	4.925 4.9	5 5	5.075 5.1	V
ΔV_{out}	Line Regulation (note1)	LC1117-ADJ $I_{out}=10\text{mA}$, $2.5\text{V} \leq V_{in}-V_{out} \leq 14\text{V}$		0.035	0.2	%
		LC1117-1.2V $I_{out}=10\text{mA}$, $3.0\text{V} \leq V_{in} \leq 15\text{V}$		10	15	mV
		LC1117-1.5V $I_{out}=10\text{mA}$, $3.0\text{V} \leq V_{in} \leq 15\text{V}$		10	15	mV
		LC1117-1.8V $I_{out}=10\text{mA}$, $3.8\text{V} \leq V_{in} \leq 15\text{V}$		10	15	mV
		LC1117-2.5V $I_{out}=10\text{mA}$, $3.9\text{V} \leq V_{in} \leq 15\text{V}$		10	15	mV
		LC1117-2.85V $I_{out}=10\text{mA}$, $4.25\text{V} \leq V_{in} \leq 15\text{V}$		10	15	mV

		LC1117-3.3V $I_{out}=10mA, 4.75V \leq V_{in} \leq 15V$		10	15	mV
		LC1117-5V $I_{out}=10mA, 6.5V \leq V_{in} \leq 15V$		10	15	mV
ΔV_{out}	Load Regulation (note1, 2)	LC1117-ADJ $V_{in}-V_{out}=3V, 10mA \leq I_{out} \leq 1A$		0.2	0.4	%
		LC1117-1.2V $V_{in}=3.0V, 0 \leq I_{out} \leq 1A$		8	20	mV
		LC1117-1.5V $V_{in}=3.0V, 0 \leq I_{out} \leq 1A$		8	20	mV
		LC1117-1.8V $V_{in}=3.2V, 0 \leq I_{out} \leq 1A$		8	20	mV
		LC1117-2.5V $V_{in}=3.9V, 0 \leq I_{out} \leq 1A$		8	20	mV
		LC1117-2.85V $V_{in}=4.25V, 0 \leq I_{out} \leq 1A$		8	20	mV
		LC1117-3.3V $V_{in}=4.75V, 0 \leq I_{out} \leq 1A$		8	20	mV
		LC1117-5V $V_{in}=6.5V, 0 \leq I_{out} \leq 1A$		8	20	mV
$V_{in}-V_{out}$	Dropout Voltage (note3)	$\Delta V_{out}, \Delta V_{ref}=1\%, I_{out}=100mA$		1.11	1.2	V
		$\Delta V_{out}, \Delta V_{ref}=1\%, I_{out}=500mA$		1.18	1.25	V
		$\Delta V_{out}, \Delta V_{ref}=1\%, I_{out}=1A$		1.26	1.3	V
I_{limit}	Current Limit	$V_{in}-V_{out}=2V, T_j=25^\circ C$	1	1.2	1.4	A

	Minimum Load Current (note4)	LC1117-ADJ		5	10	mA
I _q	Quiescent Current	LC1117-1.2V, Vin-Vout=1.25V		4	8	mA
		LC1117-1.5V, Vin-Vout=1.25V		4	8	mA
		LC1117-1.8V, Vin-Vout=1.25V		4	8	mA
		LC1117-2.5V, Vin-Vout=1.25V		4	8	mA
		LC1117-2.85V, Vin-Vout=1.25V		4	8	mA
		LC1117-3.3V, Vin-Vout=1.25V		4	8	mA
		LC1117-5V, Vin-Vout=1.25V		4	8	mA
I _{Adj}	Adjust Pin Current (Adjustable Version)			55	120	μA
I _{change}	Adjust Pin Current Change			0.2		μA
	Temperature Stability				0.5	%
θ _{JC}	Thermal Resistor	SOT-223		20		°C / W
		TO-252		10		
		SOT23-6		80		


Note1: The Parameters of Line Regulation and Load Regulation in Table1 are tested under constant junction temperature. The Curve of Load Regulation vs. Temperature is shown in typical parameter curve that follows.

Note2: When I_{out} varies between 0~1A, Vin-Vout varies between 1.5V~12V under constant junction temperature, the parameter is satisfied the criterion in table. If temperature varies between -40°C ≤ T_A ≤ 85°C, it needs output current to be larger than 10mA to satisfy the criterion.

Note3: Dropout Voltage is specified over the full output current range of the device, and it is tested under following testing conditions: First step is to find out the Vout value(Vout1) when $V_{in1}=V_{out}+1.5V$, second step is to decrease $V_{in}(V_{in2})$ until Vout value is equal to $98.5\%*V_{out1}(V_{out2})$. $V_{dropout}=V_{in2}-V_{out2}$.

Note4: Minimum Load Current is defined as the minimum output current required to maintain regulation. When $1.5V \leq V_{in}-V_{out} \leq 12V$, the device is guaranteed to regulate if the output current is greater than 10mA.

BLOCK DIAGRAM

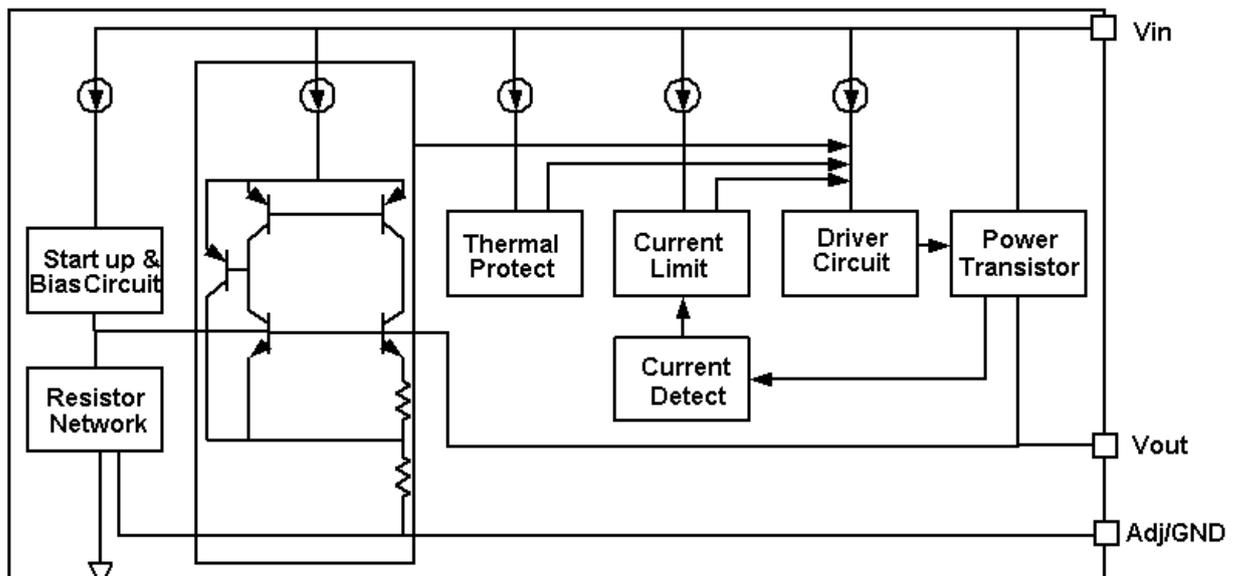

DETAILED DESCRIPTION

LC1117 is a series of low dropout voltage, three terminal regulators. Its application circuit is very simple: the fixed version only needs two capacitors and the adjustable version only needs two resistors and two capacitors to work. It is composed of some modules including start-up circuit, bias circuit, bandgap, thermal shutdown, current limit, power transistors and its driver circuit and so on.

The thermal shut down and current limit modules can assure chip and its application system working safety when the junction temperature is larger than 140°C or output current is larger than 1.2A.

The bandgap module provides stable reference voltage, whose temperature coefficient is compensated by careful design considerations. The temperature coefficient is under $100\text{ppm}/^{\circ}\text{C}$. And the accuracy of output voltage is guaranteed by trimming technique,

TYPICAL APPLICATION

LC1117 has an adjustable version and five fixed versions, Chart1 is its typical application:

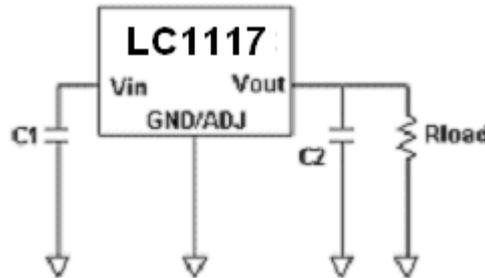


Chart 1: Application circuit of LC1117 fixed version

APPLICATION HINTS

- Recommend using 10 μ F tan capacitor as bypass capacitor(C1) for all application circuit.
- Recommend using 22 μ F tan capacitor to assure circuit stability.
- Using a bypass capacitor(CAdj) between the adjust terminal and ground can improve ripple rejection, This bypass capacitor prevents ripple from being amplified as the output voltage is increased. The impedance of CAdj should be less than the resistor's(R1) which is between output and adjust pins to prevent ripple from being amplified at any ripple frequency. As R1 is normally in the range of 200 Ω ~350 Ω ,the value of CAdj should satisfy this equation: $1/(2\pi * F_{ripple} * C_{adj}) < R1$. Recommend using 10 μ F tan capacitor.

OUTPUT VOLTAGE OF ADJUSTALBE VERSION

LC1117 adjustable version provide 1.25V Reference Voltage. Any output voltage between 1.25V~13.8V can be available by choosing two external resistors (connection method is shown in chart 2). In chart 2, R1,R2 is the two external resistors

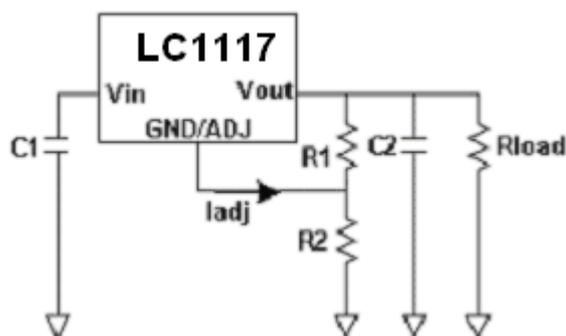


Chart 2. Application Circuit of LC1117 adjustable version

EXPLANATION

The output voltage of adjustable version satisfies this followed equation:
 $V_{Out}=V_{Ref}*(1+R2/R1)+I_{Adj}*R2$. We can ignore I_{Adj} because I_{Adj} (about $50\mu A$) is much less than the current of $R1$ (about $4mA$).

How to choose $R1$: The value of $R1$ should be in the range of $200\Omega \sim 350\Omega$ to assure chip working normally without any load. To assure the electrical performance showed in table 1, the output current should be larger than $5mA$. If $R1$ is too large, the minimum output current should be larger than $4mA$, The best working condition is to assure that the output current exceeds $10mA$.


THERMAL CONSIDERATIONS

We have to take power dissipation into consideration when output current or dropout voltage is considerably large, hence the power dissipation consumed by LC1117 is significantly large. Thermal considerations of LC1117 series — especially SOT-223 and SOT23-6 package types— need to be taken account of in such cases. The copper area of application board can affect the total thermal resistance. For instances, the thermal resistance of SOT223 is $20^{\circ}C/W$, If copper area is $5cm*5cm$ (two sides) , the thermal resistance is about $30^{\circ}C/W$., and the overall junction to ambient thermal resistance is about $20^{\circ}C/W+30^{\circ}C/W$. We can decrease total thermal resistance by increasing copper area in application PCB board.


For SOT23-6 package, due to its limited thermal capability, it is highly recommended that the maximum power dissipation be kept under $1W$. However, with proper PCB design , a power dissipation up to $1.2W$ can be achieved without compromising device and system reliability. Special discretion needs to be taken if the device normal power dissipation exceeds $1W$.

TYPICAL PERFORMANCE CHARACTERISTICS



1.LC1117 Dropout Voltage

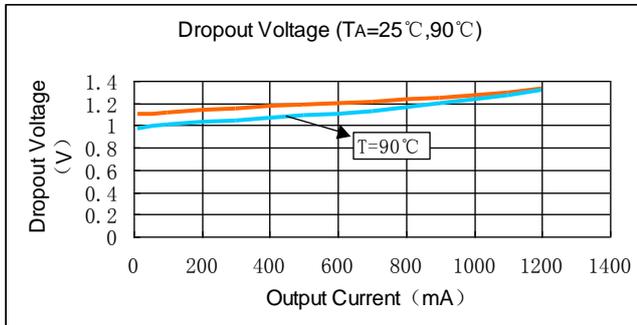



2.LC1117 Line Regulation

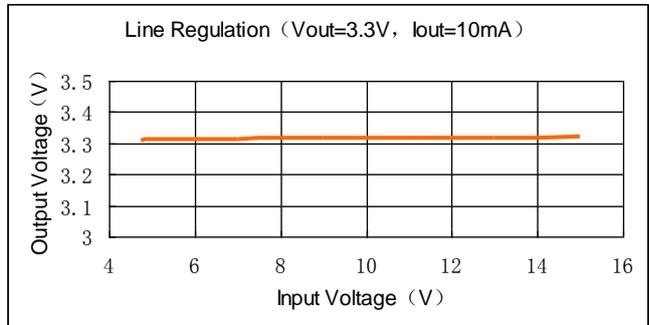


3.LC1117 Load Regulation

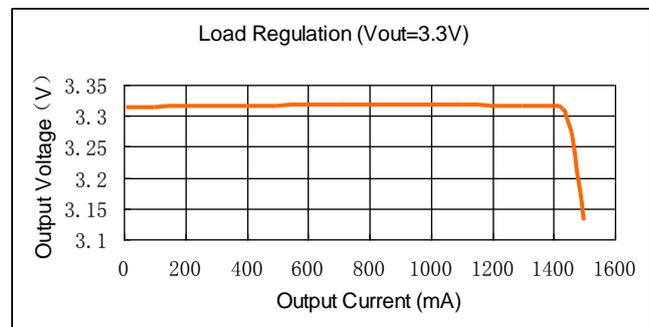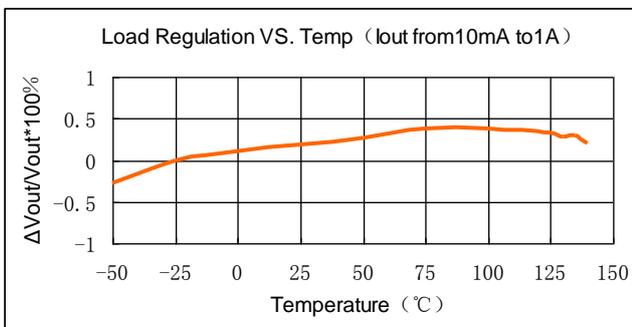


4.LC1117 Temperature Stability

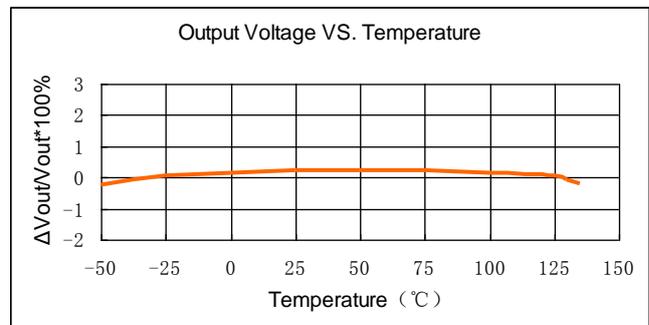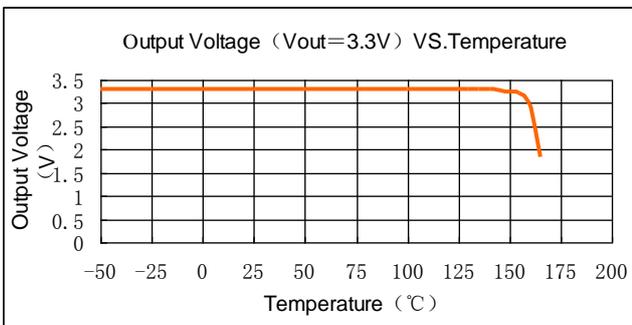

5.LC1117 Adj Pin Current VS. Temperature

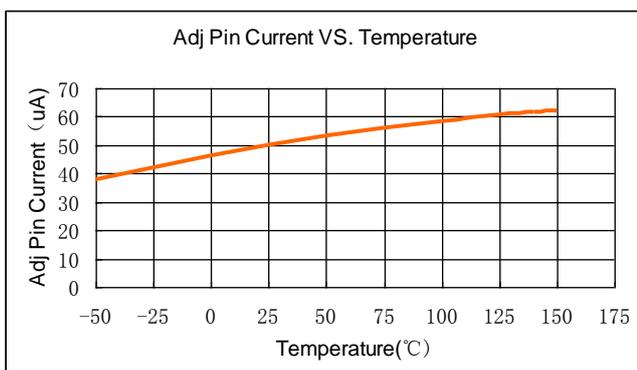


6.LC1117 Load Transient Response

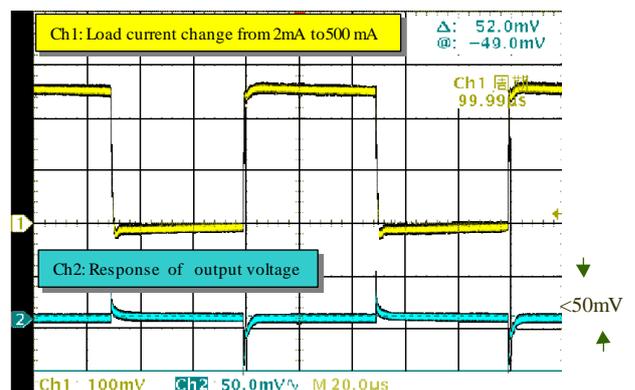

PACKAGE LINE

Package	SOT-223	Devices per reel	2500	Unit	mm
<p>Package specification:</p> <p>The technical drawing consists of three views of the SOT-223 package:</p> <ul style="list-style-type: none"> Top View: Shows a rectangular package with a central square pad. Dimensions include a total width of 6.50 ± 0.20 mm, a total height of 7.00 ± 0.30 mm, a central pad width of 3.00 ± 0.15 mm, and a pad height of 3.50 ± 0.20 mm. Lead spacing is 2.30 ± 0.10 mm and lead width is 0.71 ± 0.10 mm. Side View: Shows the package profile with a lead height of 0.90 ± 0.15 mm, a lead thickness of 0.30 ± 0.05 mm, and a lead width of 0.25 mm. The lead is bent at $12^\circ \pm 2^\circ$ and the package body is bent at $6^\circ \pm 3^\circ$. Radii of $R0.15 \pm 0.05$ mm are specified for the lead bends. Perspective View: Shows the package from an angle with a lead height of 0.40 mm, a lead width of 0.05 ± 0.04 mm, and lead angles of $11^\circ \pm 2^\circ$ and $12^\circ \pm 2^\circ$. 					


PACKAGE LINE (Continued)

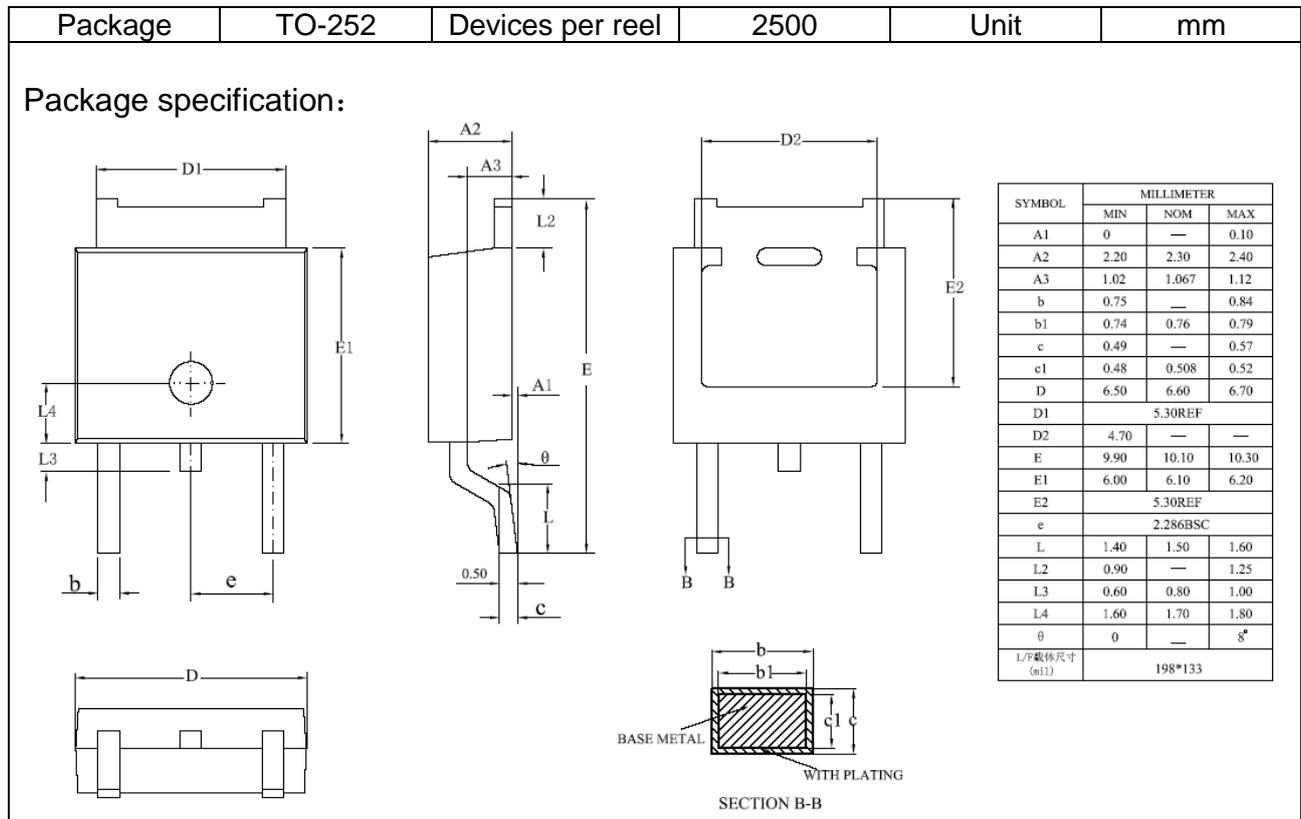

LC1117

Package	SOT23-6	Devices per reel	3000	Unit	mm
---------	---------	------------------	------	------	----

Package specification:

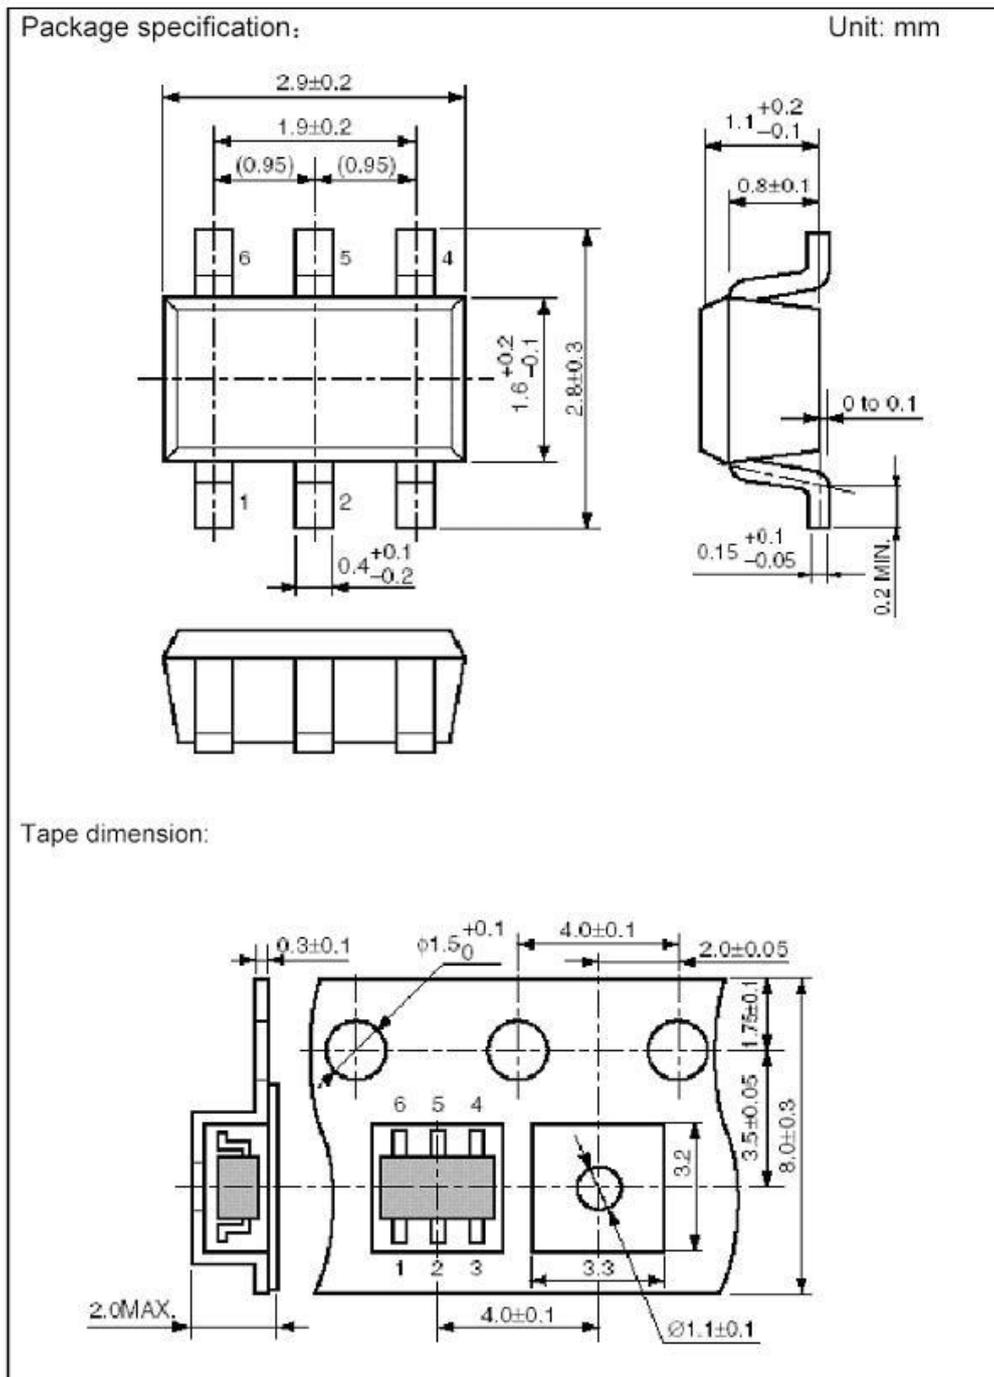

代理商：深圳市琪远电子有限公司
 电话：(0755)86228541 / 17727576605
 更多产品请访问：www.siitek.com.cn