



# LC1084

**5A Bipolar Linear Regulator**

## DESCRIPTION

LC1084 is a series of low dropout three terminal regulators with a typical dropout voltage of 1.4V at 5A load current.

Other than fixed voltage versions (1.8V, 2.5V, 3.3V, 5.0V), LC1084 has an adjustable voltage version, with which desired voltage can be achieved by setting the values of two external resistors of the application circuitry.

LC1084 offers thermal shut down and current limit functions to assure the stability of chip and power system.

LC1084 series is available in standard packages of TO-263-2L, TO-263-3L, TO-220 and TO-252.

## FEATURES

- Fixed and adjustable versions.
- Maximum output current : 5A
- Maximum input voltage: 15V
- Line regulation: 0.2% (Typical)
- Load regulation: 0.2% (Typical)
- On-Chip Thermal Shutdown
- Operation environment Temperature: 0°C ~ 80°C

## APPLICATIONS

- Power Management for Computer Mother Board, Graphic Card
- Battery Charger
- Post Regulators for Switching Supplies
- Microprocessor Supply

## TYPICAL APPLICATION

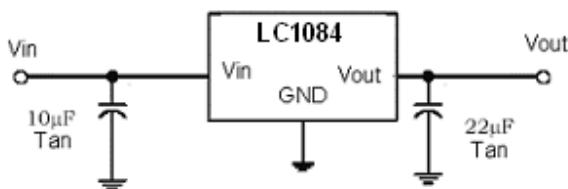


Fig 1. LC1084 fixed version Application circuit

NOTE: Input capacitor ( $C_{in}=10\mu F$ ) and Output capacitor ( $C_{out}=22\mu F$ ) are recommended in all application circuit. Tantalum capacitor is preferred.

## ELECTRICAL CHARACTERISTICS

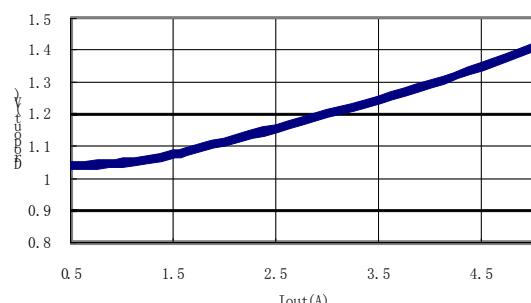


Fig 2. Dropout Voltage VS. Output Current

## ORDERING INFORMATION

LC1084 [1](#) [2](#) [3](#) [4](#) [5](#)

Code	Description
<a href="#">1</a>	Temperature&Rohs: C: 0~80°C, Pb Free Rohs Std.
<a href="#">2</a>	Package type: O: TO-252 M: TO-263-2L M3: TO-263-3L N: TO-220-3
<a href="#">3</a>	Packing type: TR: Tape&Reel (Standard) TB: Tube (TO-220)
<a href="#">4</a>	Output voltage: e.g. 18=1.8V 33=3.3V AD=Output adjustable
<a href="#">5</a>	Voltage accuracy: Blank(default)=± 2%

## ABSOLUTE MAXIMUM RATING

Parameter	Value						
Max Input Voltage	15V						
Operating Junction Temperature( $T_j$ )	150°C						
Ambient Temperature( $T_a$ )	0°C –80°C						
Package Thermal Resistance	<table border="1"> <tr> <td>TO-252</td> <td>12.5°C / W</td> </tr> <tr> <td>TO-263</td> <td>3°C / W</td> </tr> <tr> <td>TO-220</td> <td>3°C / W</td> </tr> </table>	TO-252	12.5°C / W	TO-263	3°C / W	TO-220	3°C / W
TO-252	12.5°C / W						
TO-263	3°C / W						
TO-220	3°C / W						
Storage Temperature( $T_s$ )	-40°C -150°C						
Lead Temperature & Time	260°C,10S						

### Note:

Exceed these limits to damage to the device.  
Exposure to absolute maximum rating conditions may affect device reliability.

## RECOMMENDED WORK CONDITIONS

Parameter	Value
Input Voltage Range	Max.15V
Operating Junction Temperature( $T_j$ )	0°C –125°C

## PIN CONFIGURATION

Product Classification	LC1084COTR□□
Marking	(TO-252)  1084 B XXYYZZ 1 Vss/ADJ 2 Vout 3 Vin 1 2 3
Product Classification	LC1084CMTR□□
Marking	(TO-263-2L)  1084 B XXYYZZ 1 Vss/ADJ 2 Vout 3 Vin 1 2 3
Product Classification	LC1084CM3TR□□
Marking	(TO-263-3L)  1084 B XXYYZZ 1 Vss/ADJ 2 Vout 3 Vin 1 2 3
Product Classification	LC1084CNTB□□
Marking	(TO-220)  1084 B XXYYZZ 1 Vss/ADJ 2 Vout 3 Vin 1 2 3
Vss/Adj	Ground Pin/Adjustable
Vin	Supply Voltage Input
Vout	Output Voltage

**ELECTRICAL CHARACTERISTICS**T<sub>j</sub>=25°C

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V <sub>ref</sub>	Reference Voltage	10mA≤I <sub>out</sub> ≤5A ,1.5V≤V <sub>in</sub> -V <sub>out</sub> ≤5V	1.225	1.25	1.275	V
V <sub>out</sub>	Output Voltage	LC1084-1.80V I <sub>out</sub> =0mA, V <sub>in</sub> =4.8V, T <sub>j</sub> =25°C 10mA≤I <sub>out</sub> ≤5A ,3.4V≤V <sub>in</sub> ≤7V	1.773 1.764	1.80 1.80	1.827 1.836	V
		LC1084-2.50V I <sub>out</sub> =0mA, V <sub>in</sub> =5.5V, T <sub>j</sub> =25°C 10mA≤I <sub>out</sub> ≤5A ,4.1V≤V <sub>in</sub> ≤7V	2.462 2.45	2.50 2.50	2.537 2.55	V
		LC1084-3.3V I <sub>out</sub> =0mA, V <sub>in</sub> =6.3V, T <sub>j</sub> =25°C 10mA≤I <sub>out</sub> ≤5A ,4.9V≤V <sub>in</sub> ≤8V	3.25 3.234	3.3 3.3	3.350 3.366	V
		LC1084-5.0V I <sub>out</sub> =0mA, V <sub>in</sub> =8.0V, T <sub>j</sub> =25°C 10mA≤I <sub>out</sub> ≤5A ,6.6V≤V <sub>in</sub> ≤10V	4.925 4.90	5.0 5.0	5.075 5.10	V
ΔV <sub>out</sub>	Line Regulation (note 1)	LC1084-ADJ I <sub>out</sub> =10mA, 2.85V≤V <sub>in</sub> ≤10V		10	40	mV
		LC1084-1.8V I <sub>out</sub> =10mA, 3.4V≤V <sub>in</sub> ≤10V		10	40	mV
		LC1084-2.5V I <sub>out</sub> =10mA, 4.1V≤V <sub>in</sub> ≤10V		10	40	mV
		LC1084-3.3V I <sub>out</sub> =10mA, 4.9V≤V <sub>in</sub> ≤10V		10	40	mV
		LC1084-5.0V I <sub>out</sub> =10mA, 6.6V≤V <sub>in</sub> ≤10V		10	40	mV
ΔV <sub>out</sub>	Load Regulation (note 1,2)	LC1084-ADJ (ADJ connected to ground) V <sub>in</sub> -V <sub>out</sub> =1.6V, 10mA≤I <sub>out</sub> ≤4A		16	50	mV
		LC1084-1.8V V <sub>in</sub> -V <sub>out</sub> =1.6V, 0≤I <sub>out</sub> ≤4A		16	50	mV
		LC1084-2.5V V <sub>in</sub> -V <sub>out</sub> =1.6V, 0≤I <sub>out</sub> ≤4A		16	50	mV
		LC1084-3.3V V <sub>in</sub> -V <sub>out</sub> =1.6V, 0≤I <sub>out</sub> ≤4A		16	50	mV

# LC1084

		LC1084-5.0V Vin-Vout=1.6V, 0≤Iout≤4A		16	50	mV
V <sub>in</sub> -V <sub>out</sub>	Dropout Voltage (note 3)	ΔV <sub>out</sub> , ΔV <sub>ref</sub> =1%, I <sub>out</sub> =5A		1.4		V
I <sub>limit</sub>	Current Limit	V <sub>in</sub> -V <sub>out</sub> =3V, T <sub>j</sub> =25°C		7		A
	Minimum Load Current (note 4)	LC1084-ADJ		3	10	mA
I <sub>q</sub>	Quiescent Current	V <sub>in</sub> =10V		5	10	mA
I <sub>Adj</sub>	Adjust Pin Current (Adjustable Version)	2.85V ≤V <sub>in</sub> ≤4.25V, 10mA≤I <sub>out</sub> ≤5A		45	120	uA
Ripple Rejection		F=120Hz,Cout=25uF( tan), Iout=5A,Vin-Vout=3V	60			dB
I <sub>change</sub>	Adjust Pin Current Change	10mA≤I <sub>out</sub> ≤5A 1.5V≤V <sub>in</sub> -V <sub>out</sub> ≤6V		0.4	10	μA
	Temperature Stability	Iout=10mA, Vin-Vout=1.5V			0.5	%
θ <sub>JC</sub>	Thermal Resistance junction to case	TO-252 TO-263 TO-220		12.5 3 3		°C / W
OTP	Over Temperature Protection			150		°C

Note1: Line Regulation and Load Regulation in Table1 are tested under constant junction temperature.

Note2: When load current varies between 0~5A and Vin-Vout ranges from 1.5V~6V at constant junction temperature, the parameter is satisfied the criterion in table. If temperature varies between 0°C≤T<sub>A</sub>≤80°C , it needs output current to be larger than 10mA to satisfy the criterion.

Note3: Dropout Voltage is the voltage difference between the input and output pin when the input voltage is minimum to maintain the lowest spec output voltage.

Note4: Minimum Load Current is defined as the minimum output current necessary to maintain regulation. Specified output accuracy can be met when the output current exceeds the minimum load current (10mA) and the dropout voltage (V<sub>in</sub>-V<sub>out</sub>) lies between 1.5V and 6V.

## BLOCK DIAGRAM

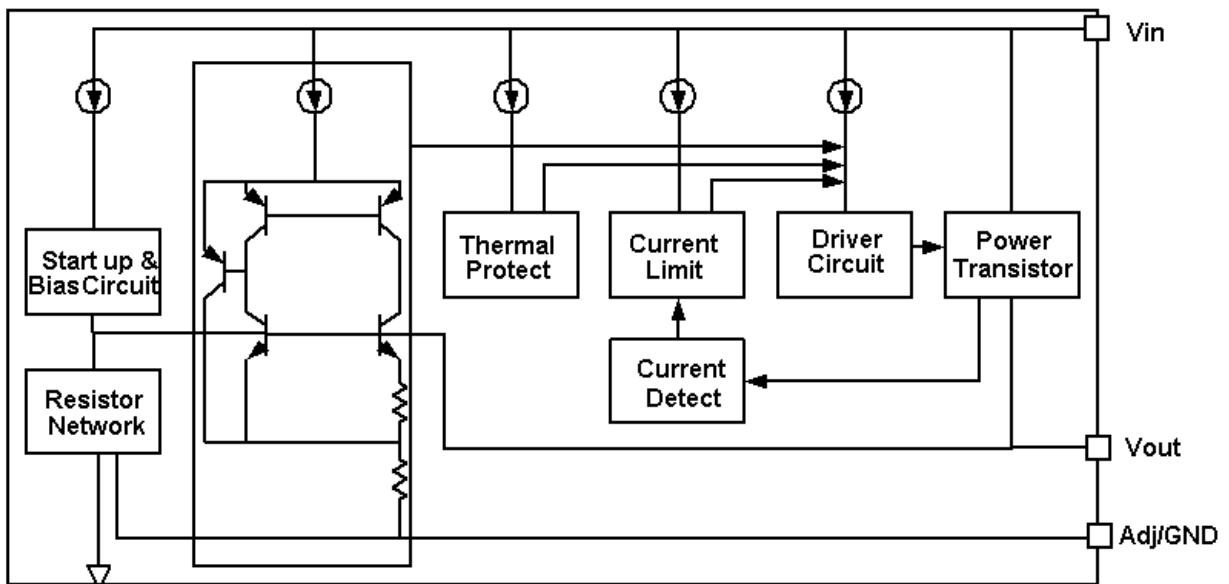


Fig 3. Block Diagram

## DETAILED DESCRIPTION

LC1084 is a series of low dropout voltage three terminal regulators. Its circuit has a trimmed bandgap reference to ensure output voltage accuracy independent of temperature variance. On-chip thermal shutdown provides protection against overload and conditions as elevated ambient temperature.

Its application circuitry requires minimum number of external components. Both fixed voltage and adjustable voltage versions need input and output capacitors to assure output voltage stability. Any desired output voltage from 1.25V to 10V can be achieved with adjustable version by assigning proper values to two external resistors in its application circuitry (as shown in Fig.4, as R1, R2 are the two external resistors.).

## TYPICAL APPLICATION

LC1084 has an adjustable version and fixed versions, Fig.4 shows their typical application circuitry. A 10uF tan capacitor connected between input and GND as bypass capacitor and a 22uF tan capacitor between output and GND are recommended for all application.

Using a bypass capacitor ( $C_{Adj}$ ) between the adjust terminal and ground can improve ripple rejection. The bypass capacitor prevents ripple from being amplified in case the output voltage is increased. The impedance of  $C_{Adj}$  should be less than the resistance of  $R_1$  to prevent ripple from being amplified at any frequency. As  $R_1$  is normally in the range of  $120\Omega \sim 200\Omega$ , the value of  $C_{Adj}$  should satisfy the following condition:

$$1/(2\pi * \text{Frequency}_{\text{Ripple}} * C_{\text{adj}}) < R_1$$

A  $10\mu\text{F}$  tan capacitor is recommended.

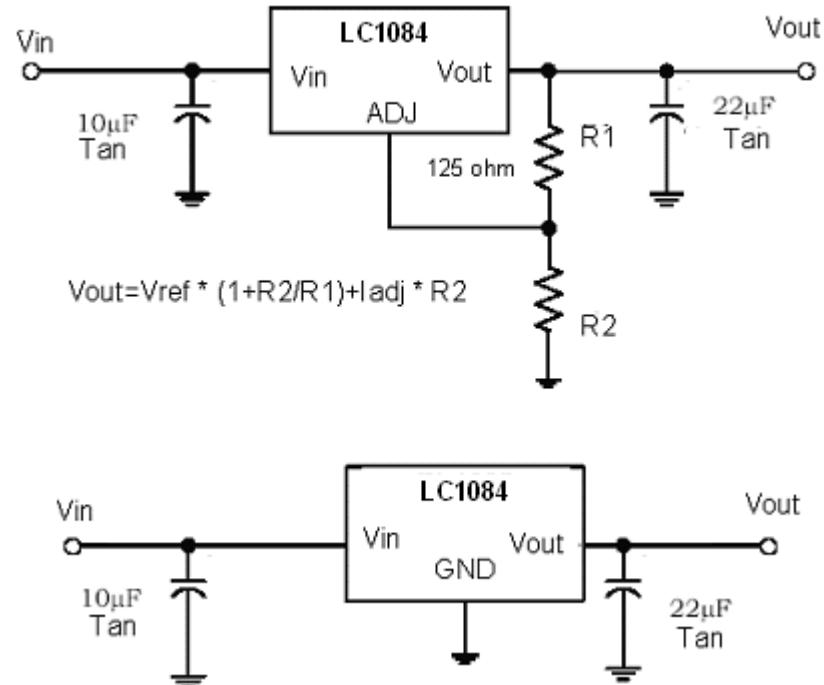


Fig 4. Typical Application of LC1084

## EXPLANATION

The output voltage of adjustable version satisfies this followed equation:


$$V_{out} = V_{Ref} \times (1 + R_2/R_1) + I_{adj} \times R_2.$$

The second term  $I_{adj} \times R_2$  can be ignored since the adjustable pin current  $I_{adj}$  ( $\sim 50\mu A$ ) is much less than the current through  $R_1$  ( $\sim 4mA$ ).


The value of  $R_1$  is preferred in the range of  $120\Omega \sim 200\Omega$  and the total output current of the adjustable version of LC1084 needs to exceed  $10mA$  to assure normal chip operation.

## TYPICAL PERFORMANCE CHARACTERISTICS


Dropout Voltage VS. Output Current

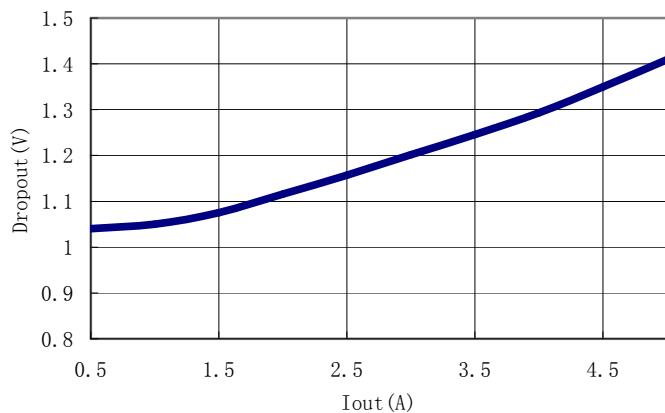


Output Voltage VS. Temperature

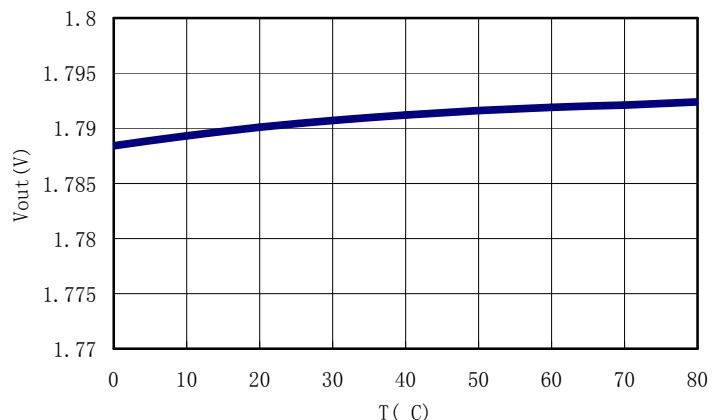


Output Voltage VS. Output Current

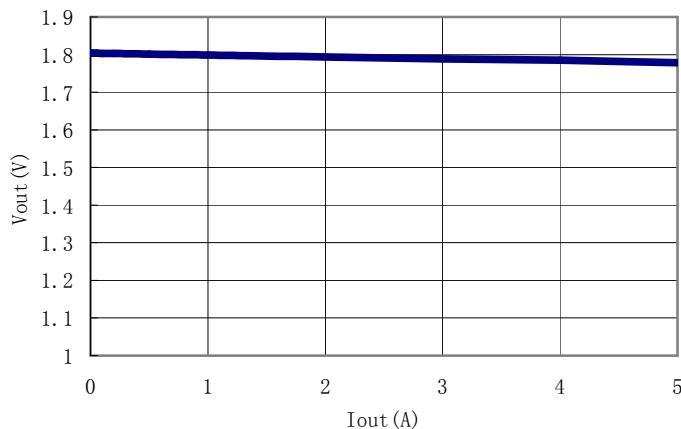




Load Transient Response

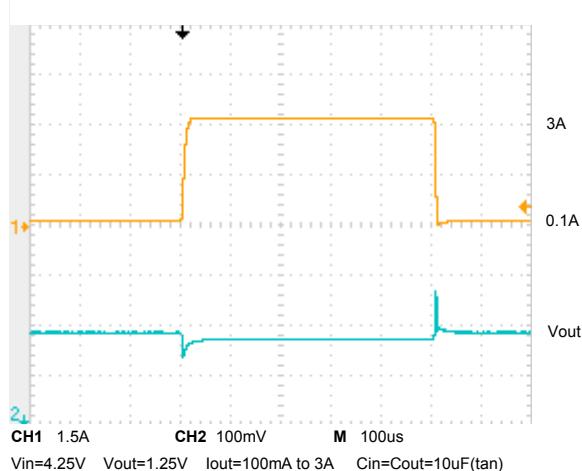

Line Transient Response

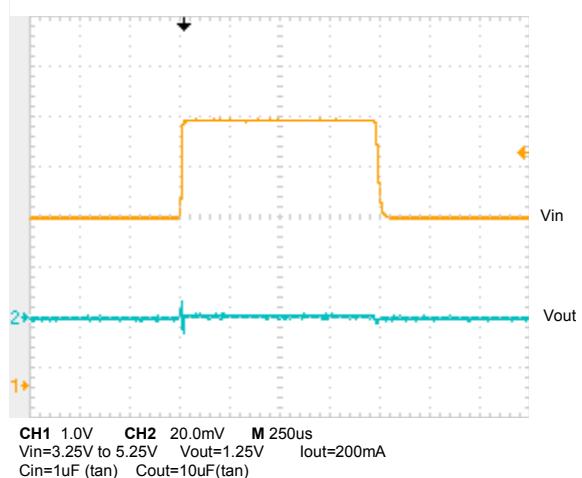


## PACKAGE LINE

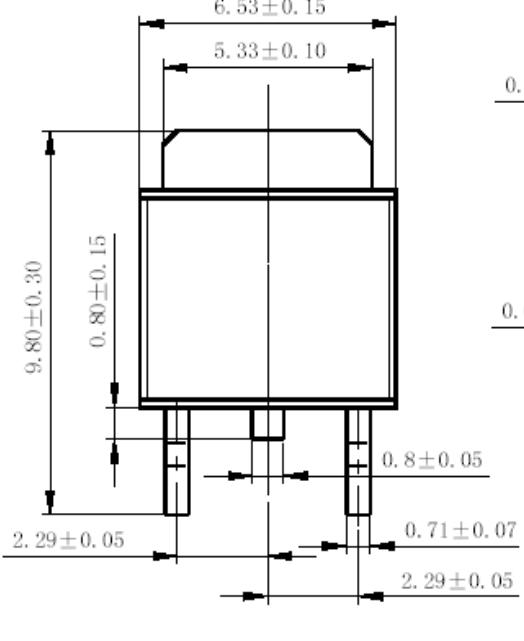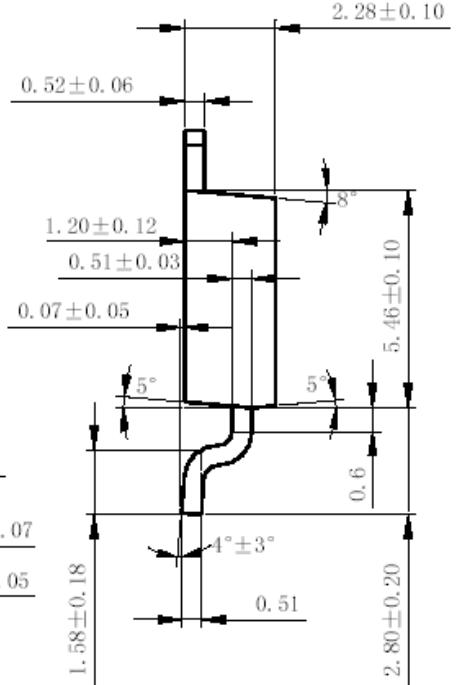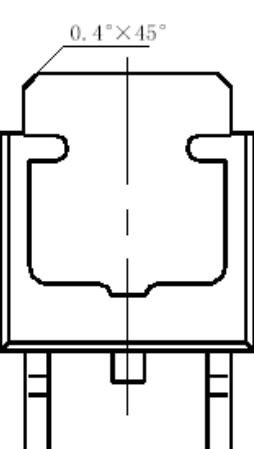Package	TO-252	Devices per reel	2500	Unit	mm
Package specification:					
					

Package	TO-220	Devices per tube	50	Unit	mm
---------	--------	------------------	----	------	----

Package specification:

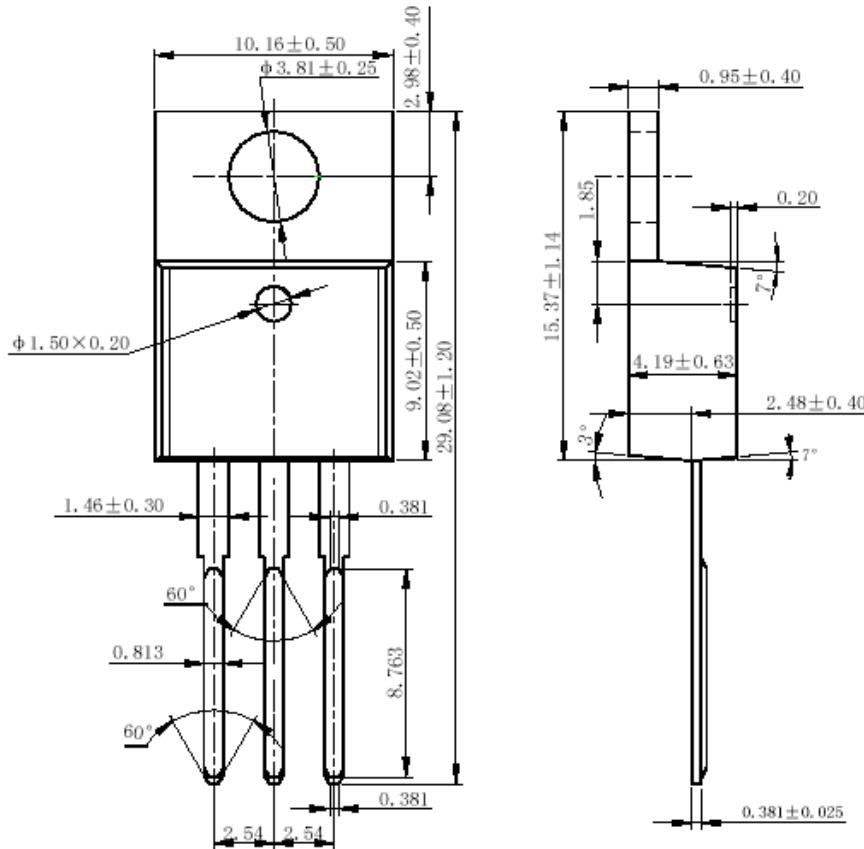

Package	TO-263-2L	Devices per reel	800	Unit	mm
Package specification:					
<p>The technical drawing illustrates the physical dimensions of the TO-263-2L package. It includes three views: a top view showing the chip carrier and lead configuration; a side view showing the height and lead spacing; and a detailed view of the bottom leads showing lead angle specifications like 3°, 7°, 2°, 8°, and 0°.</p> <p>Dimensions (in mm) from the drawing:</p> <ul style="list-style-type: none"> <li>Top View: Total width = 15.740(0.620), Total height = 14.760(0.581), Chip carrier height = 8.640(0.340), Chip carrier width = 9.650(0.380).</li> <li>Side View: Total height = 10.290(0.405), Lead pitch = 7.420(0.292), Lead thickness = 0.020(0.001) to 0.400(0.016).</li> <li>Bottom Leads: Lead length = 7.980(0.314), Lead width = 5.600(0.220), Lead angle = 3°, 7°, 2°, 8°, 0°, and 6°.</li> <li>Other: Lead spacing = 2.540(0.100), Lead thickness = 0.380(0.015), and various lead height dimensions like 1.150(0.045), 1.390(0.055), 0.510(0.020), and 0.990(0.039).</li> </ul>					

Package	TO-263-3L	Devices per reel	800	Unit	mm
Package specification:					
<p>The technical drawing provides three views of the TO-263-3L package. The top view shows the overall footprint with lead spacing and lead thickness. The side view shows the height of the package body and the lead pitch. The bottom lead detail view shows the lead profile with lead angle specifications: 3° at the top, 7° at the middle, 3° at the bottom, and 2°/8° at the lead tip. Lead thicknesses like 0.380(0.015) and lead pitches like 2.540(0.100) are also indicated.</p>					

**siiTek**

代理商 : 深圳市琪远电子有限公司  
电话:(0755)86228541 / 17727576605  
更多产品请访问 : [www.siitek.com.cn](http://www.siitek.com.cn)